

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 April 2001 (19.04.2001)

PCT

(10) International Publication Number
WO 01/27931 A1

(51) International Patent Classification?: G11C 16/04, 16/06

(21) International Application Number: PCT/US00/27755

(22) International Filing Date: 6 October 2000 (06.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/158,325 8 October 1999 (08.10.1999) US

(71) Applicant: APLUS FLASH TECHNOLOGY, INC.
[US/US]; Suite 401, 780 Montague Expressway, San Jose,
CA 95131-1323 (US).

(72) Inventors: LEE, Peter, W.; 13990 Pike Road, Saratoga,
CA 95070 (US). HSU, Fu-Chang; 1228 Cordelia Avenue,
San Jose, CA 95129 (US). TSAO, Hsing-Ya; 1288 Rosalia
Avenue, San Jose, CA 95117 (US).


(74) Agents: KAUFMAN, Michael, A. et al.; Flehr Hohbach
Test Albritton & Herbert LLP, Suite 3400, 4 Embarcadero
Center, San Francisco, CA 94111-4187 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian

[Continued on next page]

(54) Title: MULTIPLE LEVEL FLASH MEMORY

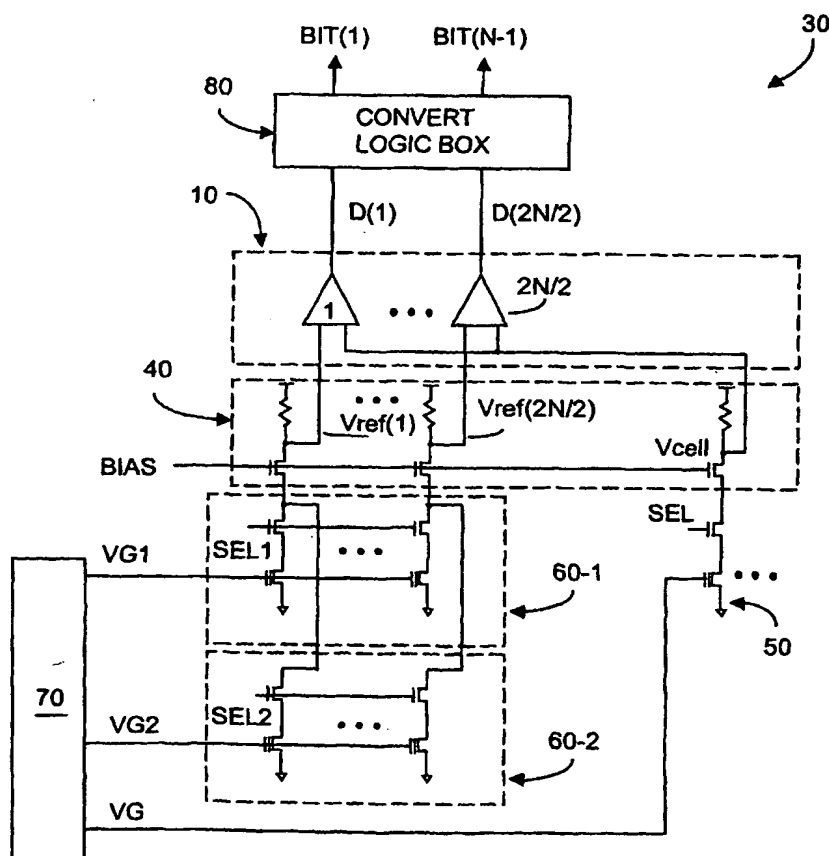

(57) Abstract: Data stored in multi-level memory cells (50) is rapidly read out with high resolution by generating and coupling a predetermined and preferable low number of large magnitude jump-like voltage changes to the control gates of the memory cells. The magnitude of the jumps can be a substantial fraction of the power supply level (VDC) and will be many times the V_t levels associated with the memory cells, e.g., the control gate voltage changes in jump-steps from say 4V to 6V to 8V. Use of a low number of jump-steps reduces read out time by permitting read out of a plurality of V_t levels during a given control voltage magnitude. Further, use of large but different magnitude control gate voltages provides good read out resolution over the range of V_t values. Reference cells (601 and 602) are provided to improve tracking, and DRAM type sense amplifiers (10) are provided to maintain high noise immunity.

WO 01/27931 A1



patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *With international search report.*

MULTIPLE LEVEL FLASH MEMORY

RELATIONSHIP TO PENDING APPLICATIONS

Priority is claimed from U.S. provisional patent application serial number 60/158,325 filed on 8 October 1999 by applicants Lee, Hsu, and Tsao herein,
5 and entitled "Multiple Level Flash Memory".

FIELD OF THE INVENTION

The present invention is directed general to non-volatile memory including so-called multiple-level memory capable of storing more than one data-bit per cell, and more particularly to circuits and techniques for reading data from
10 multiple-level non-volatile memory cells.

BACKGROUND OF THE INVENTION

Historically non-volatile memory such as electrically erasable programmable read-only-memory (EEPROM) or flash memory provided memory cells that were binary, and could store a single bit, e.g., a logical or binary "0" or "1". A
15 typical memory cell is a MOS device that includes source and drain regions formed in a substrate, a floating gate separated from the source, drain, and intermediate region of the substrate by a thin oxide layer, and an overlying control gate separated from the floating gate by a thicker oxide layer.

Coupling appropriate voltage levels to the control gate, source, or drain can
20 cause electrons to collect on the floating gate, where their presence tends to counteract the voltage level on the floating gate, reducing source-drain current flow through the cell. A sense amplifier coupled to the source of the cell can detect the reduced current flow and report a "0" as being stored in the cell. On the other hand, when the cell is erased by coupling appropriate

voltages to the control gate, source, or drain, the floating gate retains minimal charge and control gate potential will turn-on the cell, producing drain-source current flow that the sense amplifier reports as a stored "1".

Discerning whether a memory cell is storing a "0" or "1" is straightforward.

- 5 But more recently, in an attempt to increase storage density and low storage cost per bit, so-called multi-level EEPROM and flash memory units have been developed in which a memory cell can store more than one-bit of data. In essence the memory cell now stores what may be described as analog values and the multiple-level cell is characterized by an analog voltage
- 10 threshold value, V_t . Although multi-level cells and arrays can provide density and cost advantages, it is more difficult to read and identify multiple values stored in a cell, than to read whether the cell is turned off ("0") or on ("1").

- Assume a multi-level cell is to store one of sixteen levels. If the analog V_t
- 15 distribution is from about 1.0 VDC to about 5.5 VDC, the ΔV_t value associated with a given storage level is only 300 mV, e.g., $(5.5-1.0)/15$. Discerning which of the multiple levels has been stored requires accurately and preferably rapidly discerning between ΔV_t values that are only 300 mV apart. The requirement to accurately sense with sufficient resolution of at
- 20 least 300 mV over a range of about 1.0 VDC to about 5.5 VDC can be challenging in practice.

- Several solutions have been directed to the problem of reading from multi-level memory cells. For example, U.S. Patent no. 5,508,958 to Fazio, et al. (1996) and U.S. Patent no. 5,751,635 to Wong, et al. (1998) disclose
- 25 techniques for sensing the state of floating gate memory cells by applying a step-wise increasing variable voltage to the control gate of the memory cells. Fig. 1 herein exemplifies this approach, in which a stepwise-increased voltage (or ramped voltage) is applied to the control gates of cells to alter the

drain-source channel current (I_{ds}) of the cells. The value of I_{ds} will change stepwise, according to the difference between the nominal V_t value for the cell, and the control gate voltage at the moment.

5 In Fazio '958 and Wong '635 configurations, sensing DIDS involves coupling a fixed reference current loading to the drain node of the memory cell, to form a ratio-type sense amplifier. When control gate voltage is less than V_t for a cell, I_{ds} for that cell will be less than a pre-selected reference current, which causes the sense amplifier output to be "1". This sense amplifier reading indicates that the control gate voltage should be further increased, until a
10 predetermined value exceeding the cell V_t is attained. When the control gate ramp voltage level exceeds the cell V_t , I_{ds} will exceed the reference current, which pulls the sense amplifier output low, which allows the value of the cell data to be determined.

Fig. 2 is an exemplary graph of I_{ds} distribution for a multi-level memory cell
15 having sixteen levels of analog V_t values ranging from $V_{t1} = 1$ V to $V_{t16} = 7.5$ V, when applying drain voltage of 1 V and sweeping the control gate voltage V_G . In Fazio-Wong systems, the sense amplifier output is almost digital in that large voltage swings occur. If there are sixteen V_t levels ranging from about 1 VDC to about 7.5 VDC, the ΔV_t per storage level will be on the range
20 of about 0.5 V. Referring to Fig. 2, assume that the reference current is selected as 40 μ A. The horizontal row of black dots in Fig. 2 represents the sixteen gate voltages required to read out the respective sixteen levels of V_t for the memory cell. Note that since cell current I_{ds} is compared with a fixed reference current using a ramp-like gate voltage, a linear current difference
25 between adjacent V_t levels can be maintained, along with a reasonable operating margin. Thus, Fazio-Wong type read out can offer advantages including improved read out resolution, and higher sense amplifier noise immunity margin. Typically a Fazio-Wong type system can implement perhaps thirty-two to one-hundred fifty-six levels of V_t per memory cell.

However, a significant drawback of the Fazio-Wong type sense scheme is the requirement for very accurate control gate voltage levels. For each ramp step, the control gate voltage must remain at a voltage level sufficiently long to attain a stable magnitude. Unfortunately this requirement decreases operating speed for the memory system, especially read access time. For a multi-level cell storing a large number of levels, i.e., 256 levels, read time can become excessive. As a result, the Fazio-Wong type approach shown in Figs. 1 and 2 is best suited to low-speed operations, such as the storage and playback for speech data.

Further, the long read process required in a Fazio-Wong type system increases the memory cell's exposure to stress. Typically read out operations for multi-level cells requires larger magnitude control gate voltage than for binary storage cells. As a result, as long as the control gate voltage is applied to a row, or word line in an array of memory cells, all cells on the row will experience stress from the large magnitude gate voltage, and can experience a shift in cell V_t value. Therefore, it is desired to reduce read time, to reduce exposure to stress and possible disturbance of cell V_t values.

In an attempt to overcome the above-mentioned slow speed problems, alternative sensing methods have been developed, for example as disclosed in U.S. Patent no. 5,838,612 to Calligaro et al., and U.S. Patent no. 5,220,531 to Blythe et al. Rather than use Fazio-Wong type low-speed, stepwise increased gate voltages, in systems according to Calligaro-Blythe, a fixed gate voltage is coupled directly applied to the control gate of the memory cell. The fixed-gate voltage causes memory cells having different values of V_t to conduct different magnitudes of cell I_{ds} drain-source channel current. In Calligaro-Blythe type systems, the memory cell drain is connected to a reference current load, such as was described above with respect to Fazio-

Wong. A differential output voltage is derived from the ratio between the cell I_{ds} current and the reference current.

But the Calliagaro-Blythe approach has a significant drawback arising from the basic characteristic of MOS devices. In a MOS memory cell, the channel
5 current distribution for each V_t level is not linear, but rather tends to saturate as gate voltage increases relative to magnitude of V_t for the cell. Fig. 3 depicts cell current I_{ds} for sixteen values of V_t (V_{t1} , V_{t2} , ... V_{t15} , V_{t16}) for a fixed gate voltage, e.g., $V_G = 8$ VDC that is sufficiently high to turn-on all cells in the sixteen V_t range. Current distribution clearly is not linear. There
10 is better current resolution in the high V_t range, but very poor resolution in the low V_t range. This phenomenon makes it very difficult to store a large number of V_t levels in a multi-level cell because resolution will be lost for the lower V_t values. Thus, the Calliagaro-Blythe approach is best used for storing a low number of V_t levels, such as four or eight levels per memory
15 cell.

There is a need for a read out system and method for use with multi-level memory cells, in which read out can occur relatively rapidly, while maintaining acceptable read out resolution over a range of V_t levels. Such system and method preferably should be implementable inexpensively and using existing
20 processing techniques.

The present invention provides such a system and method.

SUMMARY OF THE INVENTION

The present invention reads out data stored in multi-level memory cells by generating and coupling a predetermined and preferably low number of large
25 magnitude jump-like voltage changes to the control gates of the memory cells. The magnitude of the jumps can be a substantial fraction of the power supply level and will be many times the ΔV_t levels associated with the

memory cells. For example, a first control gate voltage of perhaps 4 V is coupled to the multi-level cells, then the control gate voltage jumps to perhaps 6 V, then to 8 V, rather than slowly increase step-wise as in the prior art. The use of a relatively low number (e.g., two, three, etc.) of large magnitude step control gate voltages (e.g., 4 V, 6 V, 8 V) substantially reduces read out time by permitting read out of a plurality of V_t levels during a given control voltage magnitude. Further, the use of large but different magnitude control gate voltages provides good read out resolution over the range of V_t values. The present invention further includes reference cells that help improve tracking against variation in fabrication process, power supply, and temperature. Further, the present invention preferably uses high sensitivity, high noise immunity DRAM-type sense amplifiers to further improve read out performance.

Other features and advantages of the invention will appear from the following description in which the preferred embodiments have been set forth in detail, in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a system for reading data from multi-level memory cells, according to the prior art;

FIG. 2 is depicts distribution of channel current (I_{ds}) versus gate voltage (V_G) for a multi-level memory cell, and shows various V_t values for a given value of I_{ds} as used in Fazio-Wong type read-out systems, according to the prior art;

FIG. 3 depicts (computer simulated) distribution of channel current (I_{ds}) versus gate voltage (V_G) for a multi-level memory cell, and shows loss of I_{ds} resolution at a given value of V_G as memory cell saturation occurs, as used in Calligaro-Blythe type read-out systems, according to the prior art;

FIG. 4 depicts (computer-simulated) distribution of channel current (I_{ds}) versus gate voltage (V_G) for a multi-level memory cell, and shows preservation of substantially linear I_{ds} resolution for lower and for higher values of V_t , as used in a read-out system, according to the present

5 invention;

FIG. 5 depicts (computer-simulated) distribution of channel current (I_{ds}) versus gate voltage (V_G) for a multi-level memory cell, and shows preservation of substantially linear I_{ds} resolution for lower, for intermediate, and for higher values of V_t , as used in a read-out system, according to the

10 present invention;

FIG. 6A depicts a preferred embodiment of a DRAM-type sense amplifier used to read-out multi-level memory cells, according to the present invention;

FIGS. 6B-6B depict waveforms present at various nodes in the DRAM-sense amplifier shown in Fig. 6A, according to the present invention; and

15 FIG. 7 is an exemplary block diagram of a multi-level cell memory system with high voltage-step read-out, according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

As noted, in the prior art according to Fazio-Wong, multi-level memory cells are read out using control gate voltages that increase stepwise using a large
20 number of steps separated from each other by small voltage increments. The magnitude of these increments (e.g., hundreds of mV or less) is on the order of memory cell threshold voltages, and is a small fraction (perhaps 10% or less) of the operating potential (perhaps 10 V). If the time delays associated with providing, say, 256 stable voltage levels for a multi-level memory cell
25 having 256 V_t values are reduced by using a single fixed control gate potential, read out resolution is substantially diminished.

In contrast to the above techniques, the present invention reads out multi-level memory cells by generating and coupling a predetermined and preferably low number of large magnitude jump-like voltage changes to the control gates of the memory cells. The magnitude of the jumps can be a substantial fraction of the power supply level and will be many times the ΔV_t levels associated with the memory cells.

Referring now to Fig. 4, in one embodiment the number of large magnitude jump-like changes in the control gate voltage (V_G) is two, and the magnitude of the two V_G levels is 4 V and 8 V. Assume that the memory cells in questions that are to be read out have sixteen values of V_t : V_{t1} , V_{t2} , ... V_{t15} , V_{t16} . In the left hand portion of Fig. 4, when $V_G = 4$ V, the lower level threshold values (here V_{t1} , V_{t2} , ... V_{t7} , V_{t8}) may be read out. Next the V_G level jumps from 4 V to 6 V, and when $V_G = 8$ V, the higher level threshold values (here V_{t9} , V_{t10} , ... V_{t15} , V_{t16}) may be read out.

Note that in each case, when $V_G = 4$ V or when $V_G = 8$ V, there is substantial I_{ds} (or I_{CELL}) linearity, e.g., read out resolution will be high throughout the V_t range. This is an improvement over the non-linear, resolution loss problems associated with Calligaro-Blythe type methods.

For example when $V_G = 4$ V, memory cells associated with lower V_t values (e.g., V_{t1} , V_{t2} ... V_{t7} , V_{t8}) will turn on, and I_{ds} current flow through these memory cells will be quite linear and will provide better resolution than when V_G is at a higher magnitude, for example as high as $V_G = 8$ V. Of course at the lower level of V_G , e.g., $V_G = 4$ V, memory cells characterized by higher value V_t (e.g., V_{t9} ... V_{t16}) are not turned on and will conduct essentially no I_{ds} current. (Such higher level V_t cells would exhibit poor read out resolution if attempted at $V_G = 4$ V). But at the higher level $V_G = 8$ V, all the memory cells will turn on since $V_G > V_t$, whereupon memory cells associated with higher V_t (e.g., V_{t9} ... V_{t16}) conduct I_{ds} in a linear fashion, as shown by Fig.

4. High resolution read out from these higher Vt cells thus takes place when $V_G = 8\text{ V}$, e.g., when V_G is a magnitude sufficiently high to turn on the highest Vt memory cell, which is to say, to turn-on all Vt memory cells. Understandably, when $V_G = 8\text{ V}$, read out resolution of the lower Vt cells
- 5 (e.g., Vt1... Vt8) will diminish as these cells will saturate and be in a non-linear regime. But by applying the lower $V_G = 4\text{ V}$ and reading out the lower Vt memory cells, and then applying the higher $V_G = 8\text{ V}$ and reading out the higher Vt memory cells, high resolution read out is obtained from all cells. Thus, while use of a single fixed V_G will not provide high resolution read out
- 10 at all Vt levels, the use of several (e.g., perhaps two to four) jump-steps of high voltage V_G can permit reading out all multi-level cells rapidly and with high resolution.

- In Fig. 4, even through sixteen levels of Vt are present, there is no necessity to generate sixteen levels of V_G , in which level that might otherwise have to
- 15 be generated, at least according to the prior art, would be typically a few hundred mV separated from an adjacent level. Note too, there is no need to wait for each of sixteen stair-stepped voltage levels to stabilize before attempting read out, as in the prior art. Instead, if two jump-steps are used in the present invention, as shown in Fig. 4, the time improvement in reading
- 20 out sixteen level Vt multi-level cells will be eight-fold compared to a Fazio-Wong type system. If four jump-steps were used in the present invention, the time improvement over a Fazio-Wong type system would be four-fold. However the time improvement realized by the present invention increases substantially as the number of Vt levels is increased. Thus, for a memory
- 25 array comprising a plurality of 256 Vt level multi-level memory cells, the time advantage over a Fazio-Wong system would be 128 if two jump-steps were used in the present invention, and would be 64 if four jump-steps were used.

At each magnitude of the jump-step V_G voltage, multiple levels of Vt read outs occur simultaneously, e.g., Vt1 through Vt8 levels when $V_G = 4\text{ V}$, and

Vt 9 through Vt16 when $V_G = 8$ V for the embodiment depicted by Fig. 4. It is seen that Vt-groups of memory cells may be defined, e.g., a lower Vt range of Vt1 ... Vt8, and a higher Vt range of Vt9 ... Vt16, as exemplified by Fig. 4.

- Read out of the lower Vt range of memory cells occurs during application of the lower V_G voltage, e.g., $V_G = 4$ V in Fig. 4, and read out of the higher Vt range occurs during application of the higher V_G voltage, e.g., $V_G = 8$ V in Fig. 4.

- In addition to providing a high speed, high resolution method of reading out multi-level memory cells, sensing according to the present invention can in essence extend the Vt range. Assume for example that twenty-four Vt levels are to be defined, rather than the sixteen Vt levels used in Fig. 4. Thus, a low Vt level group (Vt1 ... Vt8) may be defined having cell Vt values from say 1 V to 3.1 V. A middle Vt level group (Vt9 ... Vt16) may be defined having Vt values from say 3.4 V to 5.5 V, and a high Vt level group (Vt17 ... Vt24) may be defined having Vt values from say 5.8 V to 7.9 V. In this twenty-four Vt level example, ΔV_t is about 0.3 V.

- Fig. 5 depicts I_{ds} current versus V_G for an embodiment having twenty-four Vt levels, where the number of jump-steps is three, and the V_G voltage coupled to the control gates of the multi-level memory cells is 4 V, then 6 V, then 8 V, although for the specific Vt voltages enumerated above, jump-step magnitudes might be 4 V, 6.5 V, and 9 V. Understandably, more than three jump-steps could be provided, if desired.

- In the embodiment shown in Fig. 5, at $V_G = 4$ V, the lower Vt level cells (e.g., Vt1, Vt2, ... Vt7, Vt8) conduct current in a substantially linear regime and may now be read out, but the higher level cells (e.g., Vt9 ... Vt24) do not yet conduct current. V_G is then jumped from 4 V to 6 V, whereupon memory cells having middle range Vt (Vt9, Vt10, ... Vt15, Vt16) conduct current in a linear regime and may now be read out. Of course the lower level Vt cells also

conduct, but in a non-linear regime, and the higher level Vt cells (Vt17, Vt18, ... Vt23, Vt24 do not yet conduct current. VG is next jumped to 8 V whereupon the higher level Vt cells (Vt17 .. Vt24) conduct current in a linear regime and may now be read out. Since VG is now greater than Vt for all of the memory cells, cells characterized by Vt1, Vt2, ... Vt15, Vt16 also conduct current, but in a non-linear regime.

The number of jump-steps, e.g., two in Fig. 4, three in Fig. 5, etc., and the magnitudes of the large jump-step voltages, e.g., 4 V, 6 V, 8 V, etc. will be designed into the system depending upon the resolution and read out time that is required. Increasing the number of jump-steps can, if the number of steps is made very large, contribute to memory cell stress.

The present invention further includes reference cells that help improve tracking against variation in fabrication process, power supply, and temperature. Further, the present invention preferably uses high sensitivity, high noise immunity DRAM-type sense amplifiers to further improve read out performance.

In the preferred embodiment, the VG gate voltage is simultaneously applied to the reference cells (e.g., 16 such cells in an appropriate embodiment) and to the multi-level memory cells. In another embodiment, the multiple reference cells are divided into groups, e.g., two groups, wherein a first group includes lower value Vt cells, and a second group includes higher Vt cells. When reading out, the lower magnitude gate voltage is applied to the first group to achieve high read out resolution among the lower Vt level memory cells. Meanwhile, the higher gate voltage is applied to the second group to achieve high resolution in the higher Vt level memory cells.

Figs. 6A-6 and Fig. 7 depict exemplary systems to implement the present invention. It is first noted that while using a preferably small number of large magnitude jump-steps can provide rapid and high resolution read out of multi-level memory cells, the read out sense amplifier can diminish the overall effective read out resolution. For example, ratio-type sense amplifiers as shown in prior art Fig. 1 compare cell current with a reference current (generated by a NMOS device, a PMOS device, a resistor, or any other current loading) and transfer the ratio of cell current and reference current into an analog voltage output. For multi-level memory cells, the cell current difference between levels can be very small, and the differential voltage to be read out with a sense amplifier can also be very small, perhaps 10 mV. This small differential voltage requires a sense amplifier having high sensitivity but also high noise-immunity to detect. But conventional differential-type ratio sense amplifiers as used in the prior art are not good candidates in a high resolution system due to the poor noise-immunity exhibited by such sense amplifiers.

In a preferred embodiment, as a substitute for prior art differential-type sense amplifiers, the invention provides a DRAM-type sense amplifier 10, such as shown in Fig. 6A to sense I_{ds} current flow in multi-level memory cells. Advantageously, DRAM-type sense amplifier 10 uses a two-phase, sampling-and-evaluation operation. Referring to Figs. 6A-6F, during the sampling phase defined by a Sample Enable signal (see Figs. 6B, 6C) DRAM-type sense amplifier 10 samples an input voltage (V_{CELL}) and samples a reference voltage (V_{REF}) from data lines to a sensing node (DATA and its complement DATAB, see Fig. 6F in which V_{ref} is shown in bold for clarity).

During an evaluation phase, sense amplifier 10 isolates the sensing nodes from the data lines, and a cross-coupled latch circuit 20 is activated to develop the differential input voltages into a full V_{dd} - V_{ss} range. This mode of operation assures higher noise-immunity than prior art sense amplifiers.

For example, prior art differential-type sense amplifiers do not latch or decouple the input voltage from the sensing nodes, thus putting the sense amplifier into a high-gain regime all the time. This prior art high-gain regime operation makes it difficult to maintain a stable and accurate output during the entire, typically noisy, sensing process. In addition to advantageously decoupling the input voltage from the sense nodes, DRAM-type sense amplifier 10 provides very high sensitivity, e.g., voltage levels in the few mV range can be sensed. Thus, the present invention preferably employs a DRAM-type sense amplifier to sense multi-level memory cells.

Fig. 7 is an exemplary block diagram for a system 30 implementing the present invention. System 30 includes a plurality of DRAM-type sense amplifiers 10, for example such as was described with reference to Figs. 6A-6F, a plurality of ratio-type sense amplifier 40, the multi-level memory cells 50 (only one of an array of the cells being shown for clarity), a first reference group of multi-level memory cells 60-1, a second reference group of multi-level memory cells 60-2, a gate voltage generator 70, and a convert logic box unit 80. Each DRAM-type sense amplifier 10 receives a first input from the selected memory cell, and a second input from one of the reference cells. Converter logic unit 80 receive outputs from the sense amplifiers and converts the outputs into digital data, e.g., BIT(1), etc.

The multi-level memory cells preferably are divided into several groups, such as group (a) to group (h), with a plurality of multi-level memory cells in each group. The V_t for cells in each group is incremental, as was described earlier herein. Gate voltage generator 70 generates the jump-step voltages V_G coupled to the gates of selected memory cells, and also to the gates of reference cells.

Assume read operation will now take place. Assume also that 2^N levels of V_t are stored in a multi-level memory cell, and that there are 2^N reference cells

divided into two groups G1 (60-1) and G2 (60-2) with $2^{N/2}$ reference cells in each group. Gate voltage generator 70 will first output a first gate voltage VG1 to the first reference cells in group G1 (60-1) and to the selected memory cell. As shown in Fig. 7, the drain of the reference cells and of the
5 memory cell are connected to ratio-type sense amplifiers 40, which convert the currents of each reference cell and the memory cell current into $2^{N/2}$ reference voltages $V_{ref(1)}$ to $V_{ref(2^{N/2})}$ and into cell voltage V_{cell} .

Block 10 includes $2^{N/2}$ DRAM-type sense amplifiers, and each sense amplifier receives and compares V_{cell} with one of the reference voltage, $V_{ref(1)}$ to $V_{ref(2^{N/2})}$, and then generates the comparison results, $D_{(1)}$ to $D_{(2^{N/2})}$. The
10 logic block then receives and converts the results $D_{(1)}$ to $D_{(2^{N/2})}$ into N-1 bit digital data. If a memory cell's V_t does not belong to the first group of reference cells this can be noticed from the N-1 bit data, and Gate Voltage Generator 70 will generate a second gate voltage, VG2 to the second
15 reference cells group G2 (60-2) and to the selected cell. Then, the read process of comparing currents of the selected cell with that of the $2^{N/2}$ reference cells in the second group as above-described is repeated, to determine the memory cell's N-1 bit data. Thus, only two jump-steps of gate voltage are needed to read the multi-level memory cell. Note too that this
20 described method of sensing can be used to implement parallel sensing wherein the above-described two jump-step gate voltage is applied to more than one selected memory cell. The configuration noted in Fig. 7 would be increased as needed to implement a parallel read operation.

Modifications and variations may be made to the disclosed embodiments
25 without departing from the subject and spirit of the invention as defined by the following claims.

CLAIMS

1. A method of reading out data from a plurality of multi-level memory cells characterizable by a plurality of V_t levels, the method comprising the following steps:

5 (a) coupling to a control gate of said multi-level memory cells a jump-step voltage gate signal having a first magnitude level and a higher second magnitude separated from said first magnitude level by at least one volt;

(b) when said voltage gate signal is at said first magnitude level, reading out from said multi-level memory cells current levels associated with
10 ones of said cells characterized by lower magnitude levels of said V_t levels; and

(c) when said voltage gate signal is at said second magnitude level, reading out from said multi-level memory cells current levels associated with ones of said cells characterized by higher magnitude levels of said V_t levels.

15 2. The method of claim 1, wherein said first magnitude level and said second magnitude level of said voltage gate signal are separated by at least two volts.

3. The method of claim 1, wherein said first magnitude level and said second magnitude level of said voltage gate signal are separated by at least
20 three volts.

4. The method of claim 1, wherein step (b) and step (c) is carried out at least in part using a DRAM-type sense amplifier.

5. The method of claim 1, further including divided said cells into at least three groups definable as a first block of said cells associated with a
25 lower range of said V_t levels, a second block of units associated with a middle range of said V_t levels, and a third block of units associated with a higher range of said V_t levels.

6. The method of claim 1, wherein a number of said V_t levels exceeds a value selected from a group consisting of (i) four, (ii) sixteen, (iii) thirty-two, (iv) sixty-four, (v) one-hundred twenty-eight, (vi) two-hundred fifty-six, and (vii) five hundred twelve.

5

7. The method of claim 1, further including providing a plurality of reference memory cells characterizable by a plurality of V_t values, and divisible into groups according to blocks of said V_t values.

8. A system to read out data from a plurality of multi-level memory cells characterizable by a plurality of V_t levels, the system comprising:

a voltage generator outputting a jump-step voltage gate signal having a first magnitude level and a higher second magnitude separated from said first magnitude level by at least one volt, said jump-step voltage gate signal being coupled to control gates of said cells; and

15 means for reading out from said multi-level memory cells current levels associated with ones of said cells characterized by lower magnitude levels of said V_t levels when said voltage gate signal is at said first magnitude level,; and for readout of from said multi-level memory cells current levels associated with ones of said cells characterized by higher magnitude levels of said V_t levels when said voltage gate signal is at said second magnitude level.

9. The system of claim 10, wherein said first magnitude level and said second magnitude level of said voltage gate signal are separated by at least two volts.

25 10. The system of claim 10, wherein said first magnitude level and said second magnitude level of said voltage gate signal are separated by at least three volts.

11. The system of claim 10, wherein said means for reading out includes a DRAM-type sense amplifier.

12. The system of claim 10, wherein said cells are divided into at least three groups definable as a first block of said cells associated with a lower range of said Vt levels, a second block of units associated with a middle range of said Vt levels, and a third block of units associated with a higher range of said Vt levels.

13. The system of claim 10, wherein a number of said Vt levels exceeds a value selected from a group consisting of (i) four, (ii) sixteen, (iii) thirty-two, (iv) sixty-four, (v) one-hundred twenty-eight, (vi) two-hundred fifty-six, and (vii) five hundred twelve.

14. The system of claim 10, further including a plurality of reference memory cells characterizable by a plurality of Vt values, and divisible into groups according to blocks of said Vt values.

15. The system of claim 10, further including means for compensating for at least one of (a) variation in fabrication process, (b) power supply magnitude coupled to said system, and (c) temperature of said system.

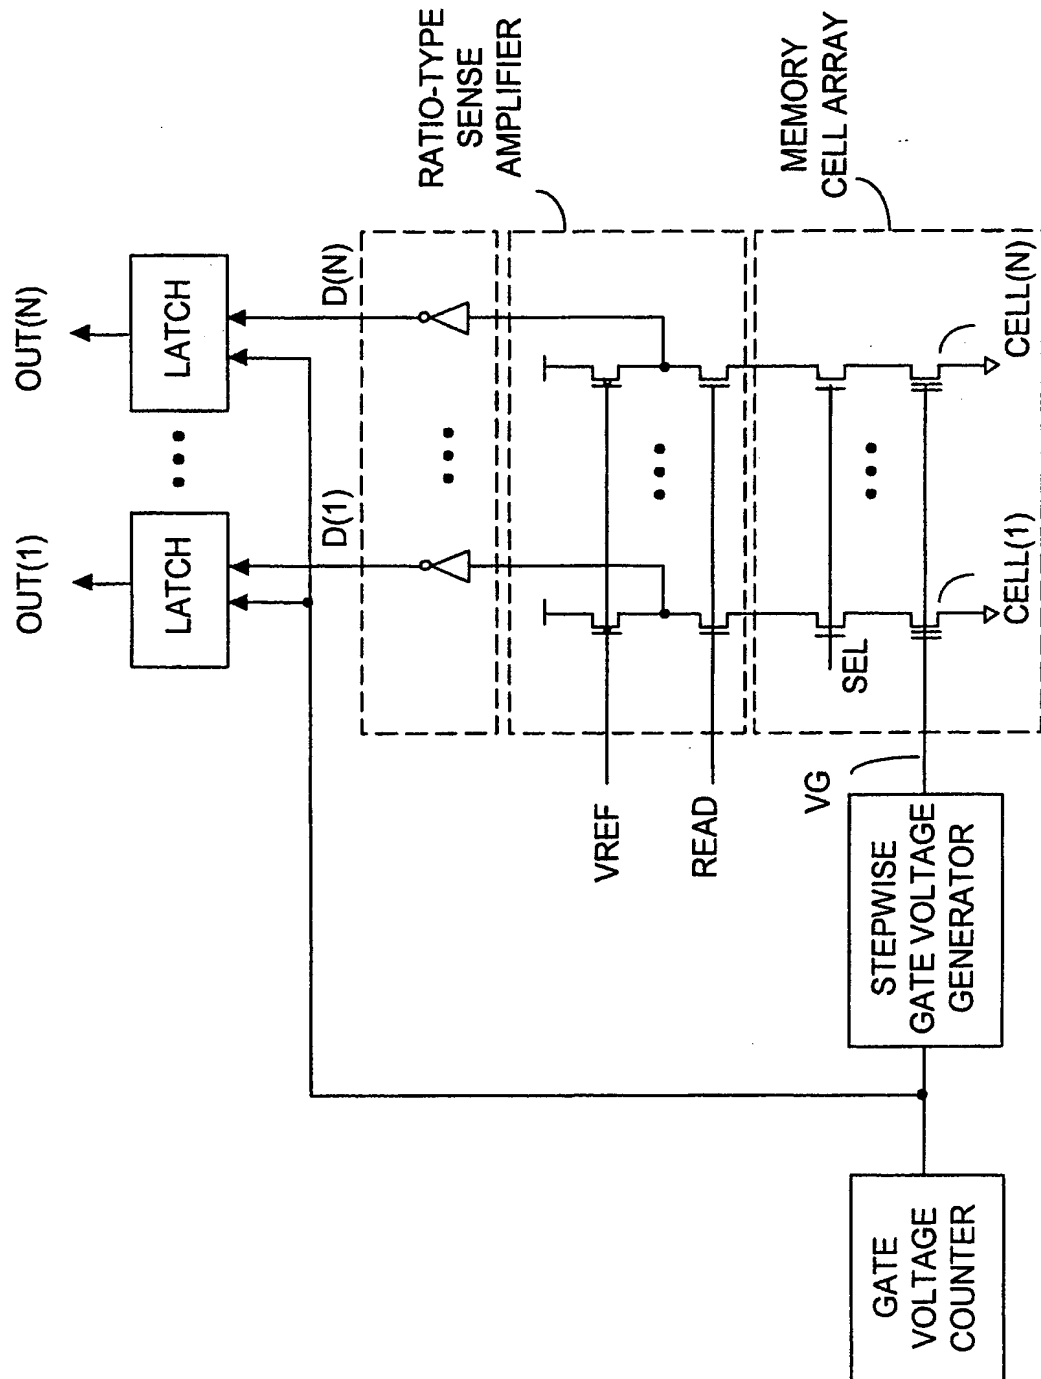


FIG. 1 (PRIOR ART)

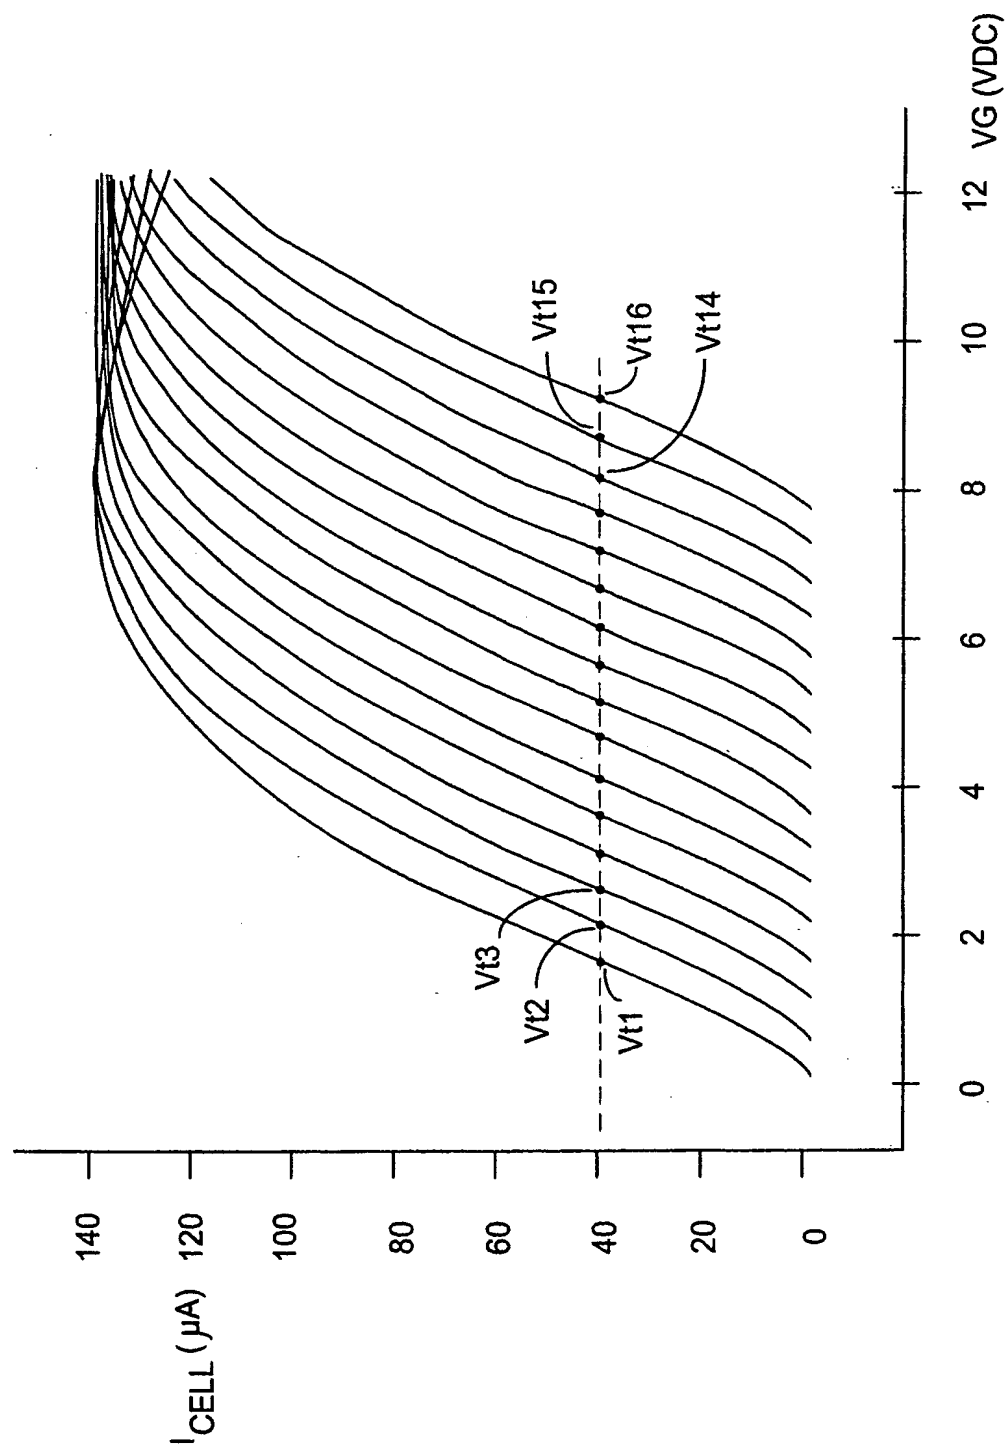


FIG. 2 (PRIOR ART)

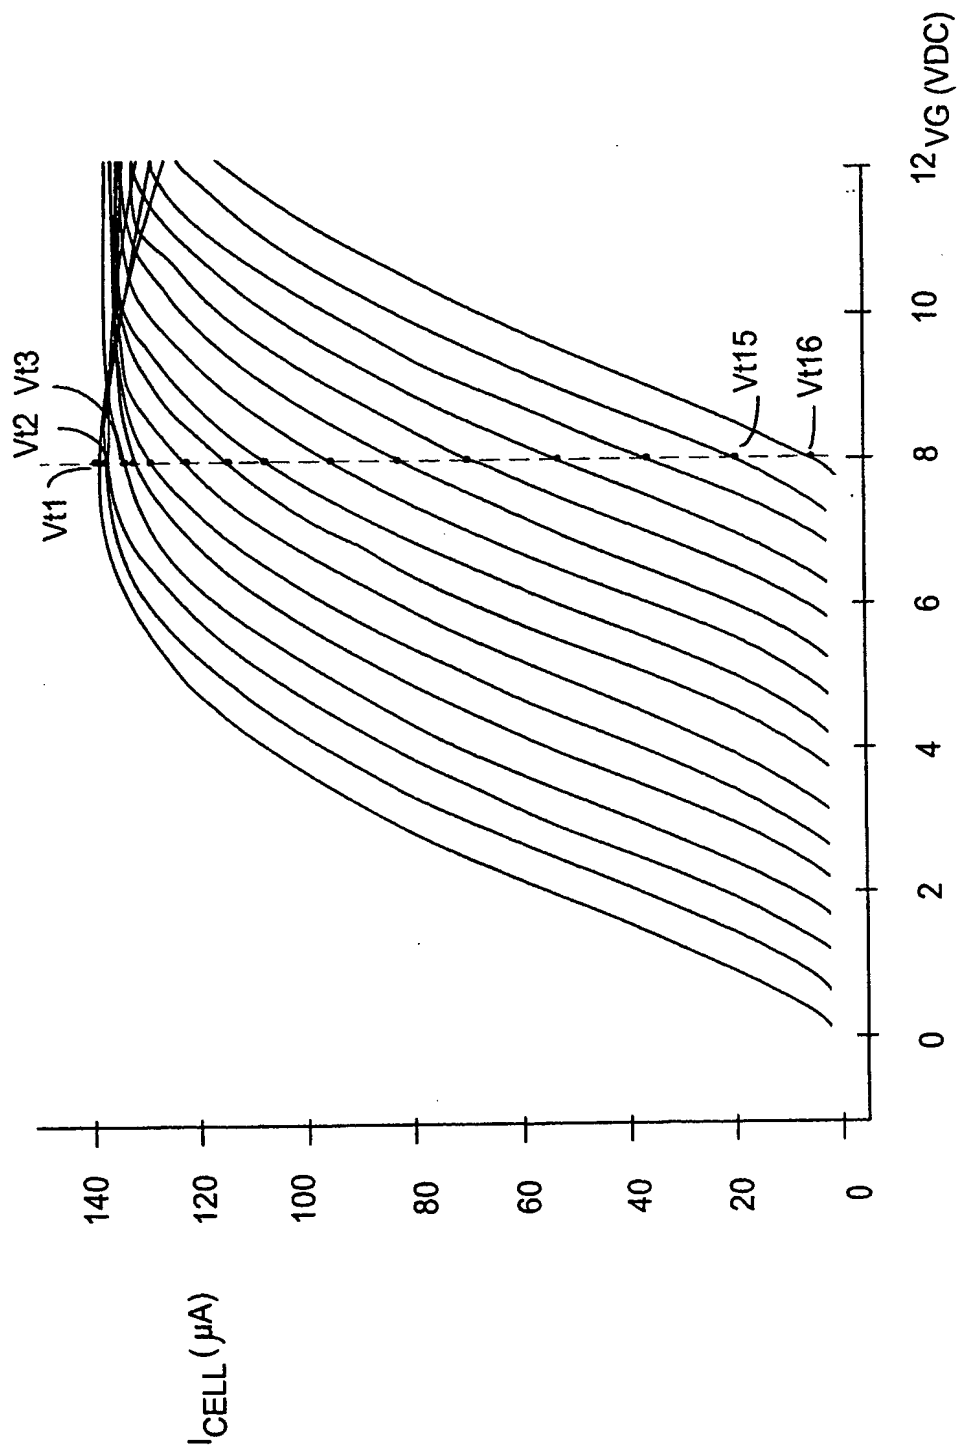


FIG. 3 (PRIOR ART)

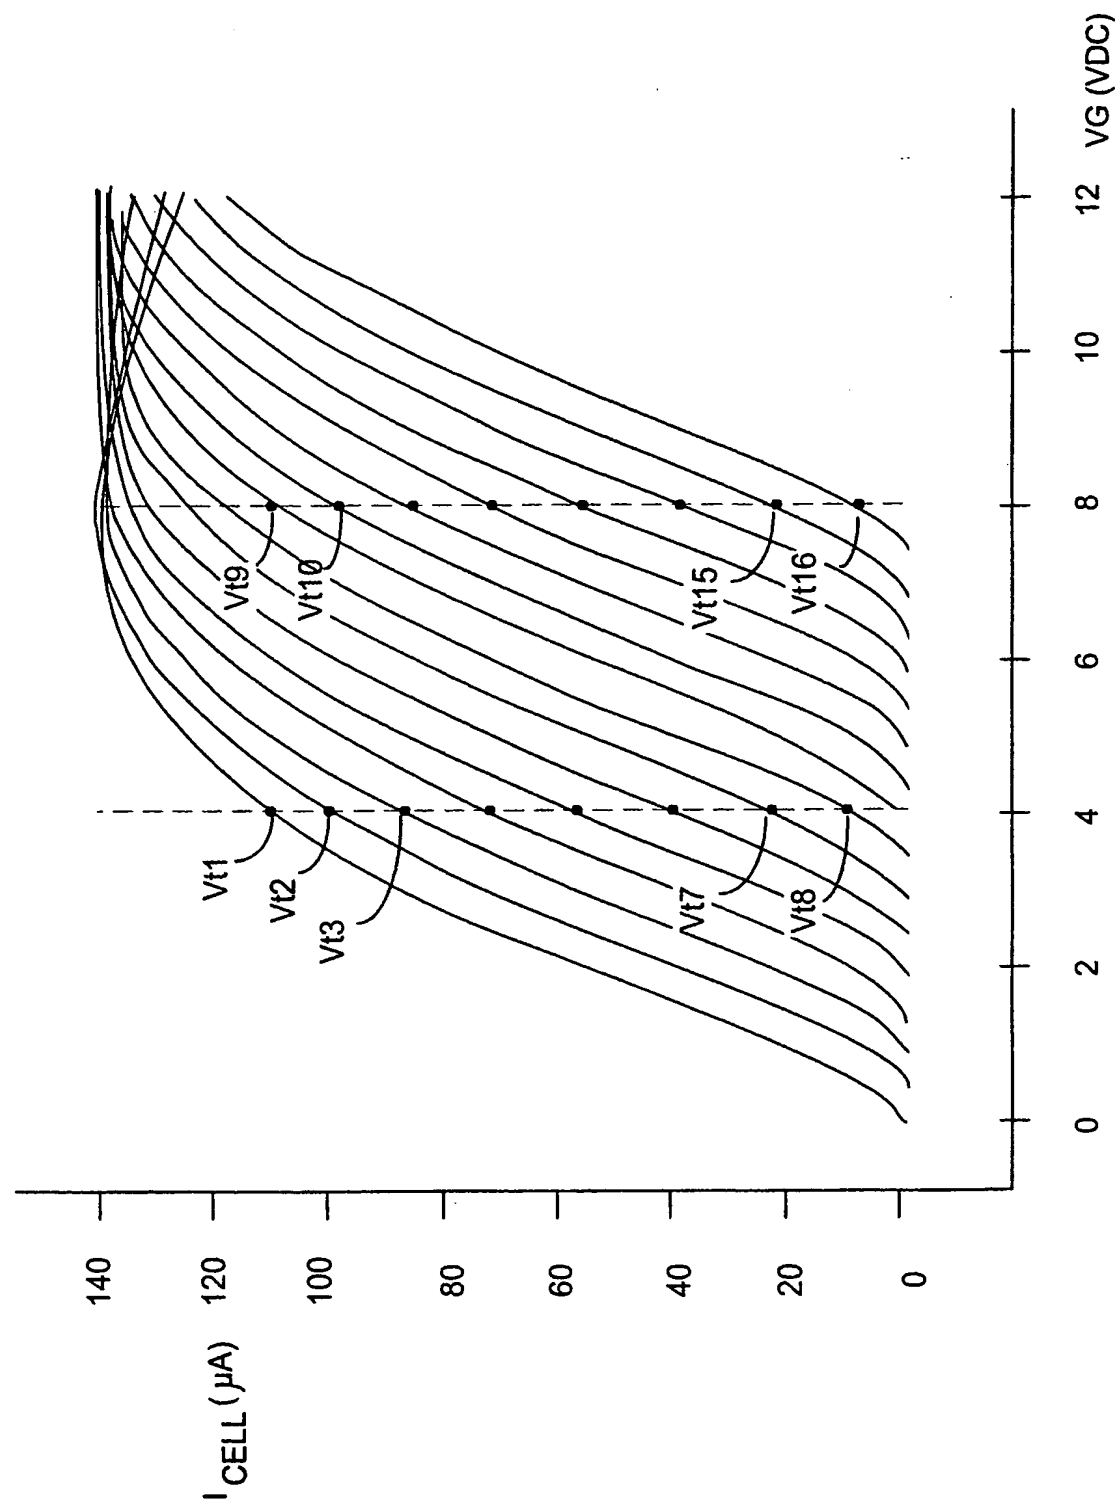


FIG. 4

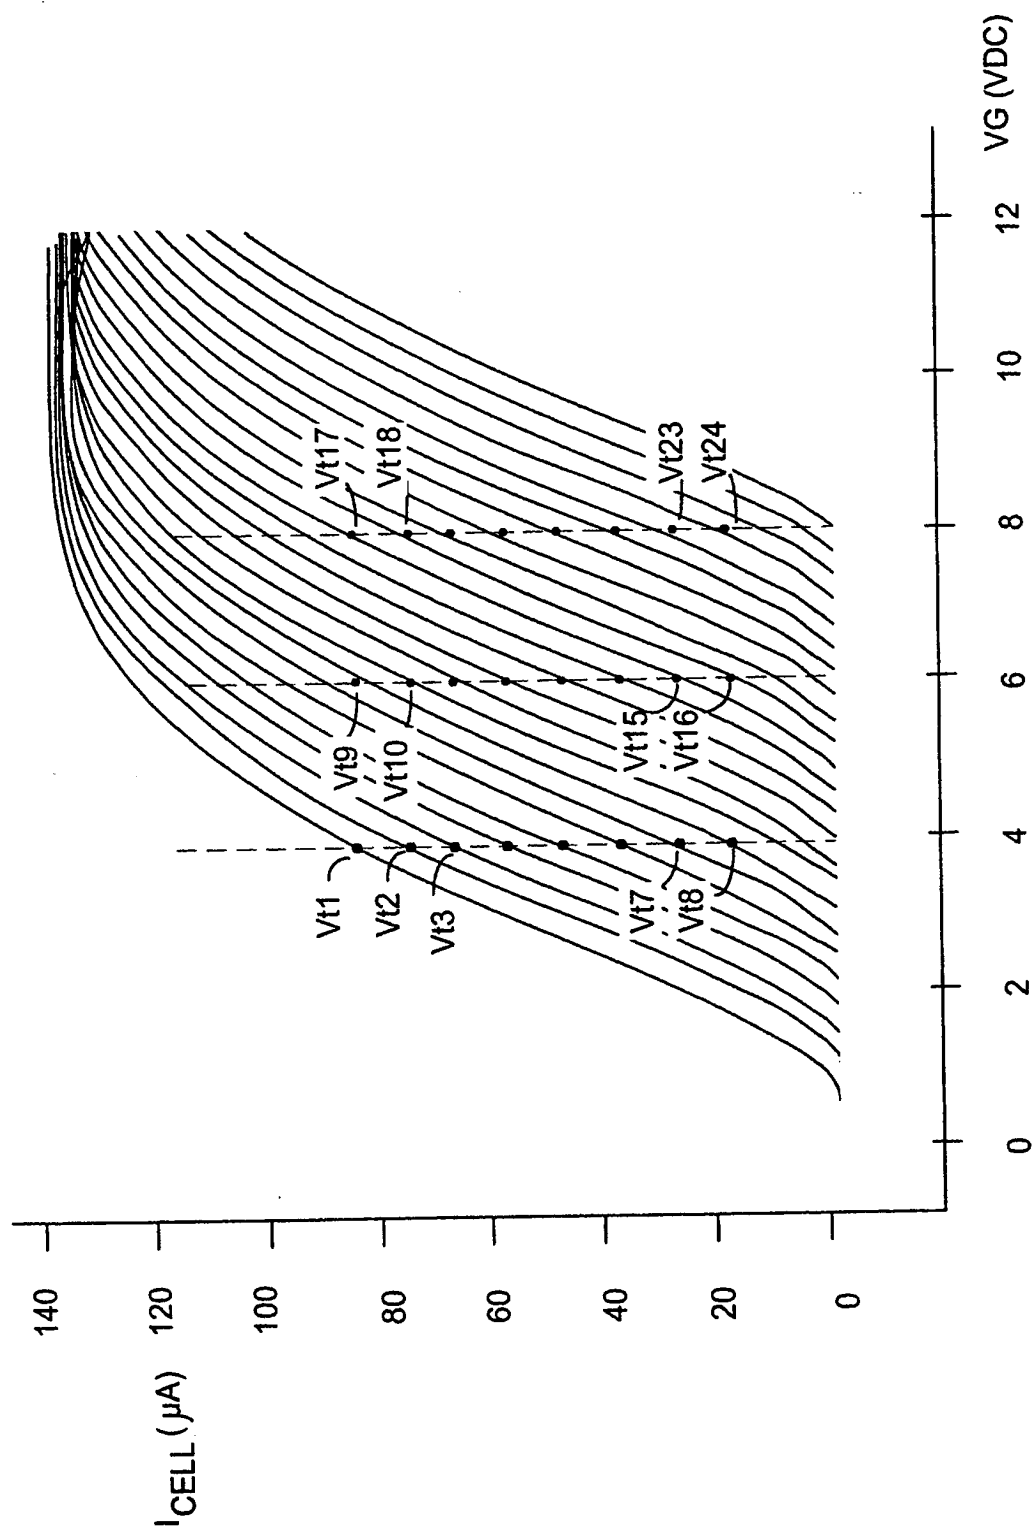


FIG. 5

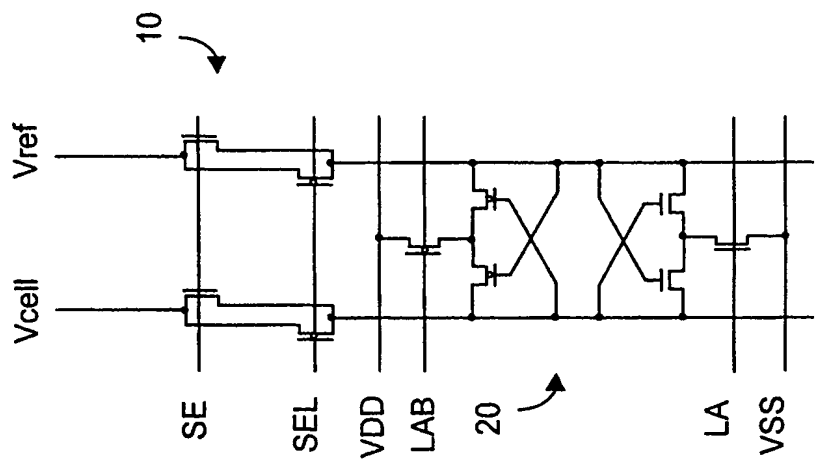


FIG. 6A

FIG. 6B



FIG. 6C



FIG. 6D


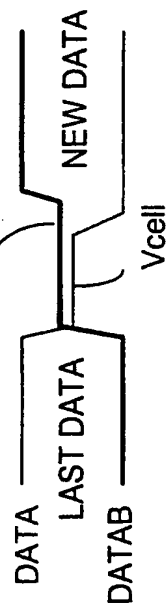


FIG. 6E



FIG. 6F



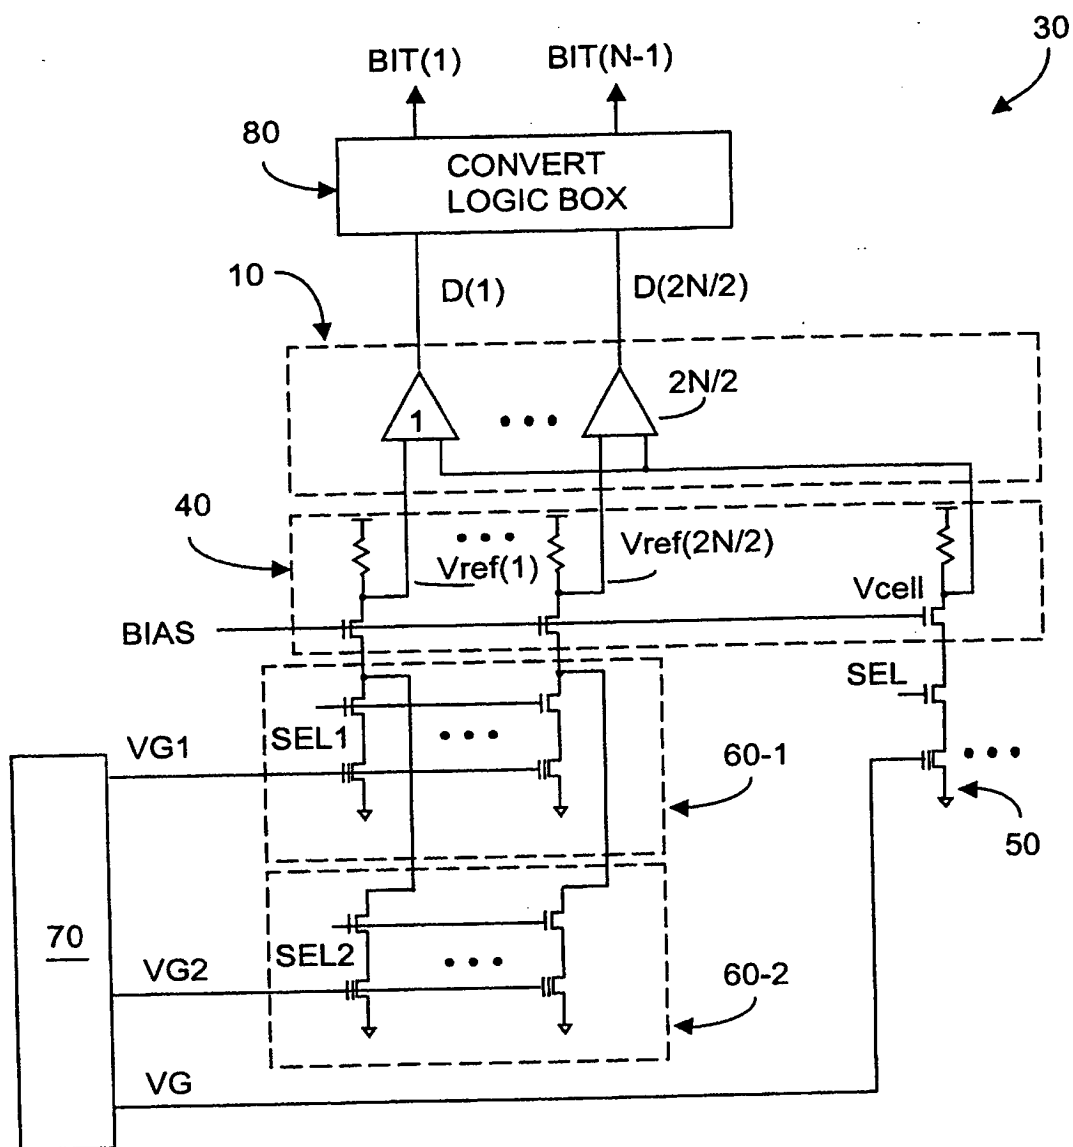


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/27755**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(7) : G11C 16/04, 16/06

US CL : 365/185.03, 185.11, 185.18, 185.19, 185.2

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 365/185.03, 185.11, 185.18, 185.19, 185.2

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONEElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
EAST**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y --- A	US 5,790,454 A (CHOI) 04 August 1998 (04.08.1998), col. 7, line 43 to col. 9, line 38, FIGS. 6-8	1, 2, 3, 6, 8 ----- 4, 7 ----- 5
Y	US 5,936,906 A (TSEN) 10 August 1999 (10.08.1999), Fig. 2.	4, 7

☐ Further documents are listed in the continuation of Box C.
 ☐ See patent family annex.

* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "Z" document member of the same patent family
---	--	--

Date of the actual completion of the international search

05 DECEMBER 2000

Date of mailing of the international search report

17 JAN 2001

 Name and mailing address of the ISA/US
 Commissioner of Patents and Trademarks
 Box PCT
 Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

VAN THU NGUYEN

Telephone No. (703) 308-0956

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/27755

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 9-15
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims: it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.